
## **M25H**

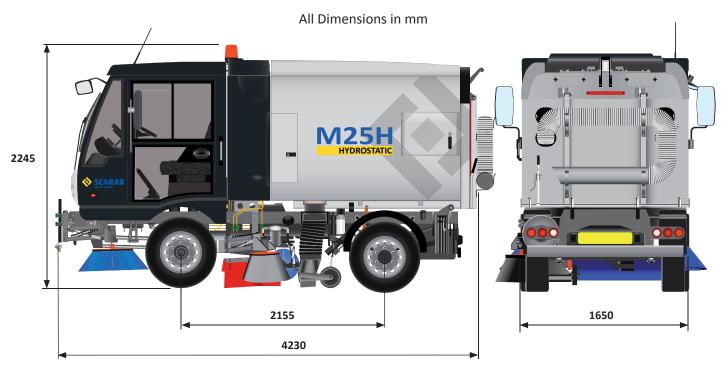

\*Dimensions representative and may vary according to options selected

General Data		
GVW	3.5 or 4.5 Tonnes	
Wheelbase	2155mm	
Overall Length*	4230mm	
Overall Height*	2245mm	
Discharge Height	750mm Std, 1600mm Hi-Tip	
Discharge Angle	45 degrees	
Door Opening Angle	90 degrees	
Filter Mesh Type	Perforated Stainless Steel	
Low Pressure Pump Output	23 lpm / 4.8 Bar	
Hydraulic Suction Filtration	125 Micron	
Hydraulic Return Filtration	20 micron	
Fan Pump Displacement	45cc / rev	
Gear Pump(s) Displacement	23cc / rev	
Suction Fan Capacity	6900 ft <sup>3</sup> /min / 195m <sup>3</sup> /min	
Suction Fan Diameter	800mm	
Sweeping Speed	0-16 mph / 0-25 kph	

Sweeping Equipment		
Front Brush Diameter	700mm	
Side Brush Diameter	500mm	
Widesweep Brush Diameter	320mm	
Brush Speeds	60-120rpm	
Side/Front Brush Life	80 Working Hours	
Widesweep Life	125 Working Hours	
Suction Tube Diameter	200mm	
Nozzle Width	490mm	

Capacities		
Hopper Volume**	2.1m³ Nett	
Hopper Volume**	2.5m³ Gross	
Actual Payload Capacity*	Up to 1800kg	
Fuel Tank	60 litres	
Water Tank	450 litres	
Hydraulic Tank	40 litres	

<sup>\*\*</sup> All Scarab Hopper Capacities are measured in accordance with European Standard EN15429

Engine Data			
Туре	Deutz TCD 2.9L4	Max Power/Torque	55.4kW/300Nm @ 1200rpm
EU Emissions Level	Stage IIIB	Aspiration	Turbocharged/Intercooled



# **Technical Specification**

## **M25H**

## **Hydrostatic System**

Variable speed control to optimise sweep performance Selection of forward/reverse travel by a single lever Max vehicle speed of 40mph (65kph)\* Gradeability up to 25%\*

\*approx. dependant on conditions, options and operating mode (Local speed limits for *mobile machinery* need to be observed)

#### **Suction Fan**

800mm diameter
Up to 2000rpm, low noise
Capacity 6900 ft3/min (195m3/min)
Stainless Steel standard

### **Suction Nozzle**

Robust all-steel construction 490mm mouth width 200mm diameter suction tube Adjustable wear-resistant flaps Low-Pressure water jets Heavy Duty rubber-tyred wheels

#### **Brushes**

700mm diameter polypropylene front brushes optional 500mm diameter steel-tined side brushes 320mm diameter polypropylene-segmented widesweep Variable speed 60-120 rpm dependent on engine speed

## **Hopper**

2.1m³ Nett Hopper Volume, capacity 2.5m³ constructed entirely of corrosion-resistant stainless steel Manually-operated rear door with safety prop Twin side loading doors Safety hopper prop Body drains at rear of hopper Stainless Steel swing-down mesh suction filter screen Access for suction fan cleaning

## **Hydraulic System**

Zinc plated steel piping where possible 10 micron filters to ensure maximum protection Hydraulic valve block in easily-accessible location 40 litre steel oil tank with 10 micron return filter Low oil automatic shut-off with sight glass

## **Water System**

Electric low pressure water pump for dust suppression
Solenoid-controlled from the CAN Bus system

#### **Water Tank**

450 litre integral stainless steel water tank Sight glass with fill level indicator

## **Ergonomic Cab**

The fully-appointed sound insulated and rubber mounted cab includes cloth upholstered driver's and passenger seats, laminated winscreen and sliding windows in each door plus a lower glazed panel in each door for extra visibility. The cab tips for easy engine access. Heated Seats and Sweeping Mirrors standard equipment

### **CAN Bus Control**

The Scarab proven CANbus system, in service since 2003 Compact panel adjacent to the driver's seat contains all controls for operating the main sweeper functions LCD screen displays relevant operating data and provides system diagnostics and a fault-finding facility Satellite control panel for frequently used operations mounted conveniently to hand, and incorporates the forward/reverse selector

## **Sweeping Widths**

Suction Nozzle only

Suction Nozzle and Side Brush

Suction Nozzle, Side Brush and and Widesweep

Front Brush, Suction Nozzle, Side Brush and Widesweep

Both Front Brushes, Suction Nozzle
Side Brush and Widesweep

Dual Sweep, all Brushes deployed

2340mm

#### **Options**

A comprehensive Options List is available for the M25H, including:-

- Front Brushes
- Dual Sweep configuration
- High Pressure Water Pump with low level warning Please contact the Scarab Sales Department for more information

